


pflug.



*Driving gear and conveyor
technology
Profiled belts
Continuous round belts
turned and plaited*

PU round- and profile belts



Product overview 2026

Round belts

Type	2 mm	3 mm	4 mm	5 mm	6 mm	6,3 mm	7 mm	8 mm	9 mm	9,5 mm	10 mm	12 mm	12,5 mm	15 mm
834 70 Sh.A sapphire blue, smooth, EU/FDA	-	X	X	X	X	-	-	X	-	-	X	-	-	-
800 75 Sh.A red, smooth	X	X	X	X	X	X	X	X	-	-	X	X	-	X
820 75 Sh.A red/sky blue, smooth EU/FDA	X	X	X	X	X	X	-	X	-	-	X	X	-	X
807 80 Sh.A transparent, smooth EU/FDA	X	X	X	X	X	-	X	X	-	-	X	X	-	X
804 85 Sh.A blue, smooth EU/FDA	X	X	X	X	X	-	-	X	-	-	X	X	-	X
824 85 Sh.A blue, smooth EU/FDA + aramid reinforced	-	-	-	-	X	-	-	X	-	-	X	X	-	-
828 85 Sh.A green, smooth	X	X	X	X	X	X	X	X	-	-	X	X	-	X
878 85 Sh.A green, smooth + aramid reinforced	-	-	-	-	X	-	-	X	X	-	X	X	-	X
802 85 Sh.A black, smooth, antistatic (75)	-	X	X	X	X	-	-	X	-	-	X	-	-	-
808 88 Sh.A green, rough some Ø also in blue or white	X	X	X	X	X	-	X	X	X	-	X	X	-	X
818 88 Sh.A green, rough + aramid reinforced	-	-	-	-	X	-	-	X	X	-	X	X	-	X
801 90 Sh.A white, smooth	X	X	X	X	X	-	-	X	-	-	X	X	-	X
811 90 Sh.A white, smooth + aramid reinforced	-	-	-	-	X	X	-	X	-	-	X	X	-	X
809 40 Sh.D beige, smooth	X	X	X	X	X	X	X	X	-	X	X	X	X	X
819 40 Sh.D beige, smooth + aramid reinforced	-	-	-	-	X	X	-	X	-	-	X	X	X	X
806 55 Sh.D beige, smooth	-	X	X	X	X	X	-	X	-	X	X	X	X	X
816 55 Sh.D beige, smooth + aramid reinforced	-	-	-	-	X	X	-	X	-	X	X	X	X	X
Package size	200 m	200 m	200 m	200 m	100 m	100 m	100 m	100 m	100 m	100 m	100 m	50 m	50 m	50 m
Weight per 100 m	0,5 kg	0,9 kg	1,6 kg	2,4 kg	3,2 kg	3,5 kg	4,7 kg	6,0 kg	7,6 kg	8,5 kg	9,4 kg	13,5 kg	14,7 kg	21,5 kg

New

Special materials and other diameters on request.

Hollow round belts

Type	4,8 x 2,0 mm	6,3 x 2,5 mm	8,0 x 3,2 mm	9,5 x 3,8 mm	12,5 x 5,2 mm	15,0 x 5,2 mm
810 75 Sh.A red	X	X	X	X	X	X
830 75 Sh.A red, EU/FDA	X	X	X	X	X	X
814 85 Sh.A blue, EU/FDA	X	X	X	X	X	X
838 85 Sh.A green	-	X	X	X	X	-
Package size	200 m	100 m	100 m	100 m	50 m	50 m
Weight per 100 m	1,8 kg	3,2 kg	5,1 kg	7,2 kg	12,4 kg	19,0 kg

Can also be connected by using our metal nipples.

V-belts

Type	6 x 4 mm	8 x 5 mm	10 x 6 mm	13 x 6,5 mm	13 x 8 mm	17 x 11 mm
840 75 Sh.A red	X	X	X	-	X	X
847 80 Sh.A transparent, EU/FDA	X	X	X	X	X	X
844 85 Sh.A blue, EU/FDA	X	X	X	-	X	X
854 85 Sh.A blue, EU/FDA + aramid reinforced	-	-	X	-	X	X
848 85 Sh.A green	-	X	X	-	X	X
858 85 Sh.A green + aramid reinforced	-	-	X	-	X	X
841 90 Sh.A white	-	X	X	-	X	X
851 90 Sh.A white + aramid reinforced	-	-	-	-	X	X
849 40 Sh.D beige	-	X	X	-	X	X
859 40 Sh.D beige + aramid reinforced	-	-	-	-	X	X
846 55 Sh.D beige	-	X	X	-	X	X
856 55 Sh.D beige + aramid reinforced	-	-	-	-	X	X
Package size	50 m / 250 m	50 m / 250 m	50 m / 150 m	50 m / 100 m	50 m / 100 m	50 m / 100 m
Weight per 100 m	2,3 kg	4,0 kg	6,0 kg	9,1 kg	10,0 kg	18,0 kg

All V-profiles can also be delivered as notched profiles. Further hardness degrees and colours for tracking guides on request. V-Profiles with coatings on request.

Flat profiles

Type	2 mm	3 mm
870 75 Sh.A red	X	X
860 75 Sh.A red, EU/FDA	X	X
867 80 Sh.A transparent, EU/FDA	X	X
864 85 Sh.A blue, EU/FDA	X	X
868 85 Sh.A green	X	X
861 90 Sh.A white	X	X

Further sizes and deliverable widths on request.

Nipple connectors

Typ	
981 4,8 mm	X
981 6,3 mm	X
981 8,0 mm	X
981 9,5 mm	X
981 12,5 mm	X
981 15,0 mm	X

We gladly advise you in choosing the most suitable profile for your needs and support you with technical calculations and our experience of many decades in the dimensioning of your drive system and transportation.


Further types such as V-ledge belts, parallel and double V-belts and processed profiles are available on request.

All our FDA-types fulfil the requirements of the EU directive 10/2011.

Of course all our types are also available as endless types.

Technical data on request.

Joining tools

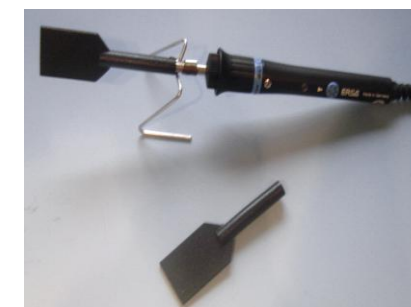

Welding unit 760CD



Guide clamp FZ01




Guide clamp FZ02



Bevelling Shear 90°/45°

pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

Company profile



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

Testing Service



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

**Welded timing belts
in short lengths**



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

**Round belts for
heat-setting machines**




pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

Endless injected round belts




pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

Endless turned round belts



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

Endless plaited round belts



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

Hooked belts



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

PU round- and profile belts




pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

**PU profile belts and
special profiles**



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

**PU tracking guides, cleats
and guides**




pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

Food line
Types for the food industry compliant to EU/FDA




pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

PU cleats and block profiles



pflug. Antriebs- und Fördertechnik
Profile Belts
Endlose Bandlängen
gedreht und geflochten

PU Poly-V belts



pflug. Driving gear and conveyor technology
Profile Belts
Continuous round belts
turned and plaited

**PU-V-guide belts
compliant to EU/FDA**



pflug. Antriebs- und Fördertechnik
Profile Belts
Endlose Bandlängen
gedreht und geflochten

PU coatings



© Copyright Any duplication, processing, distribution or any form of utilization requires our prior written consent.

Pflug Antriebs- und Fördertechnik
Lange Str. 38
D-89547 Gerstetten-Deitingen

Phone: 0049 (0)7324/5413
Fax.: 0049 (0)7324/5316

E-Mail: info@seilerei-pflug.de
HP: www.seilerei-pflug.com

Effective 03/2026