

pflug.



*Driving gear and conveyor
technology
Profiled belts
Continuous round belts
turned and plaited*

PU V-ledges belts

EU/FDA compliant



PU V-ledge belts

In the width division 17,5 mm


By dividing the guide wedge in several small wedges considerably smaller deflection diameter can be realized compared to belts with only one large central guide wedge.

Thus, the lateral transverse forces are spread evenly over the entire width of the belt.


Easy to guide and absolutely true to track.

Due to the large selection of our types you may find right belt for every application.

All types are EU/FDA compliant according to EC directive 1935/2004 and 2002/72/EC or EU VO No. 10/2011 as well as the FDA guideline CFR Title 21 of the US Food and Drug Administration for direct contact with unpackaged food.

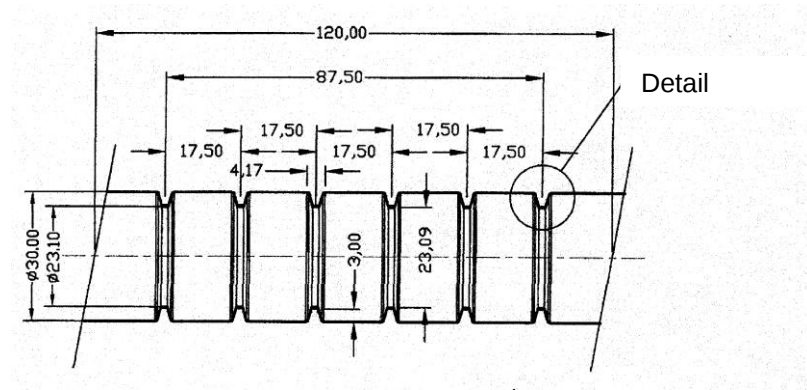

Roller profile

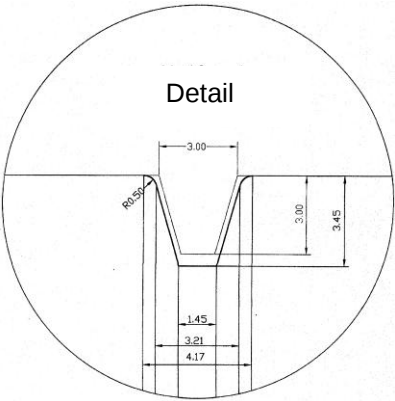

Wedge stitch

Belt types


Typ	Minimum pulley-diameter	Pre-tension recommended	Tracking force ² in N per 17.5 mm width at 2% preload	Available widths
314 60 Sh.A ultramarine blue, EU/FDA	25 mm	2 %	7,2 N	17,5 – 105 mm
315 70 Sh.A sapphire, EU/FDA	30 mm	2 %	10,8 N	17,5 – 105 mm
316 75 Sh.A sky blue, EU/FDA	35 mm	2 %	21,6 N	17,5 – 105 mm
317 80 Sh.A transparent, EU/FDA	40 mm	2 %	18,6 N	17,5 – 105 mm
318 85 Sh.A ultramarine blue, EU/FDA	40 mm	2 %	20,8 N	17,5 – 105 mm
319 90 Sh.A white EU/FDA	50 mm	2 %	25,6 N	17,5 – 105 mm

² Dynamically tested at 2000 r/min.

Material properties


Type	Adhesion	Friction coefficient ¹ μ to V2A Steel / Murtfeld S green ground Superfinish		Temperature-resistant °C	Tensile strength MPa DIN 53504-S2 / ISO 37	Abrasion mm ³ DIN ISO 4649-A
60 Sh.A ultramarine blue, EU/FDA	very high	0,70 μ	0,40 μ	-30°C - +55°C	26	44
70 Sh.A sapphire, EU/FDA	very high	0,65 μ	0,40 μ	-35°C - +60°C	30	45
75 Sh.A sky blue, EU/FDA	high	0,60 μ	0,40 μ	-20°C - +60°C	45	30
80 Sh.A transparent, EU/FDA	high	0,55 μ	0,30 μ	-20°C - +60°C	45	25
85 Sh.A ultramarine blue, EU/FDA	average	0,55 μ	0,30 μ	-20°C - +60°C	45	25
90 Sh.A white, EU/FDA	low	0,45 μ	0,25 μ	-15°C - +70°C	50	25

¹ According to Pflug test specification SPPN 91.001

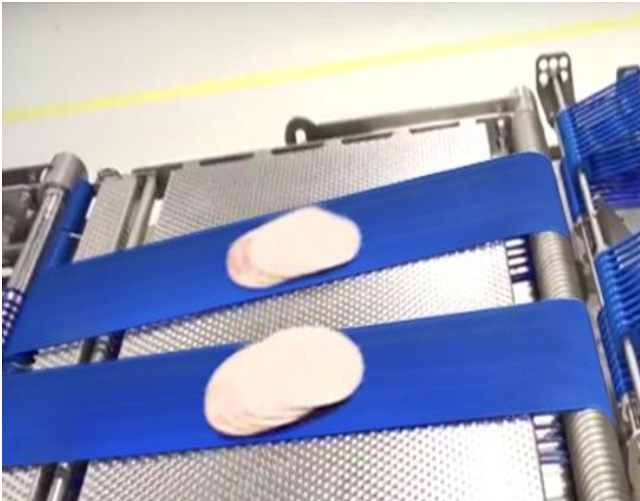

Our FDA/EU-compliant types are characterized by:

- excellent resistance to hydrolyses
- very good resistance to microbes
- particularly suitable for the use in wet areas
- highly abrasion-resistant
- high flexibility at low temperatures
- available from 60 Sh.A – 90 Sh.A
- easy to clean

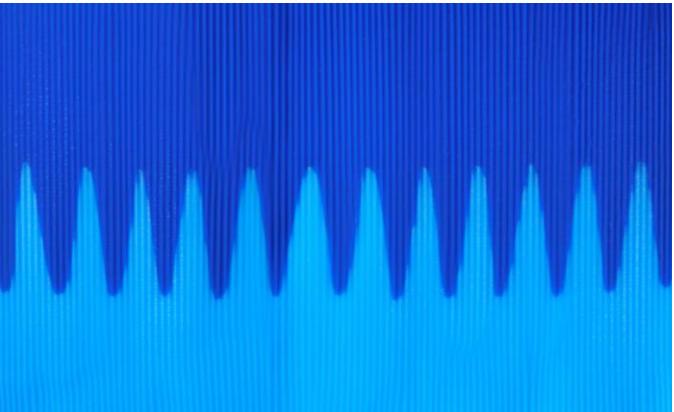

V-ledge belts are manufactured ex works from 320 mm with finger-joints and shape-welding³.


This guarantees smooth running, even under mechanical stress or small deflections.



V-ledge belts in washing and sorting units for fruits

³ European Patent No. 2 957 419

Company profile



Testing Service




Welded timing belts in short lengths



Round belts for heat-setting machines



Endless injected round belts



Endless turned round belts



Endless plaited round belts



Hooked belts




PU round- and profile belts



PU profile belts and special profiles



PU tracking guides, cleats and guides




Food line

Types for the food industry compliant to EU/FDA




PU cleats and block profiles



PU Poly-V belts



PU-V-guide belts compliant to EU/FDA



PU coatings

